


# SPECIFICATION | SUSPENDED CEILING GRID

## WHITE EXPOSED FACE 24MM SUSPENDED CEILING:




Profiles are roll-formed from high quality galvanized steel with pre-painted capping material, providing effective protection against corrosion.

Exposed ceiling grids are ideal for offices, department stores and hospitals. The suspended ceiling system is the practical choice to access the void area above the ceiling for anytime maintenance and service.

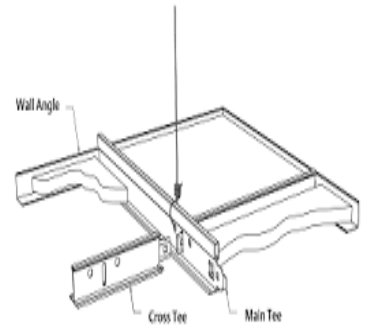

### **Main Tee:**

- Face Width: 24mm
- Web Height: 38mm
- Length: 3.6m
- Intermediate slots @ 150mm centres
- 20 units/per box
- Weight: 22kg /box



### **Cross Tee:**

- Face Width: 24mm
- Web Height: 38mm
- Lengths: 600mm and 1200mm
- 60 units/per box
- Weight 600mm: 10.5kg /box
- Weight 1200mm: 22kg /box
- The joggled end cross tee prevent tee rotation and provide complete smooth joint, eliminating gaps between main and cross tee.



### **Perimeter Trims:**

Standard wall angle (also known in the trade as M6)


Refers to the L-shaped metal strip that provides a continuous finished edge around the perimeter of the ceiling where the ceiling meets the wall.

- Face width (mm) 24x24
- Length: 3m (Chicago Metallic)
- 40 units/per box
- Weight: 18.5kg /box



Shadowline wall angle (also known in the trade as SM25)

- Face width (mm) 22x22x25
- Length: 3.6m
- 30 units/per box
- Weight: 39kg /box



**Wide range of vinyl tiles as well as mineral fibre tiles to fit our suspended ceiling grid**